



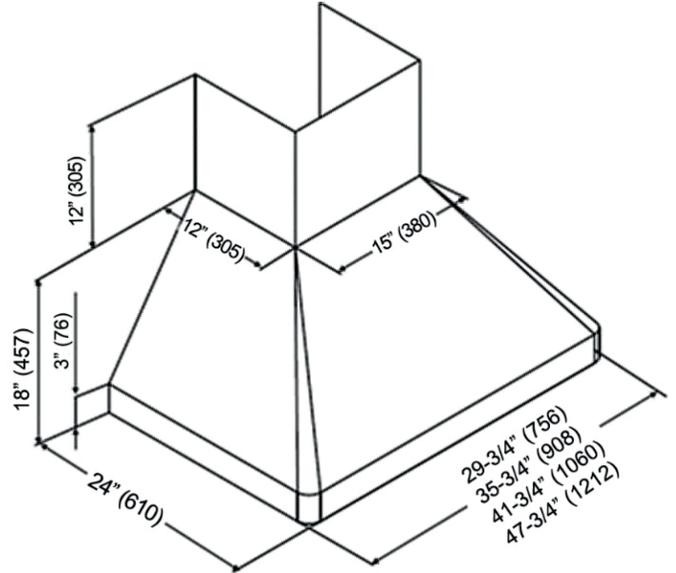


| | |
|------------------------------------|---|
| Model | RA0230SQB-DC-1 |
| Features | |
| Controls | Rotative Knobs |
| Lighting | 2, 3W LED Lamps (Bulbs included) |
| Blower Type | 760 CFM, 3-Speed |
| Blower Performance | Speed 1, 300 CFM, 1.8 Sones |
| | Speed 2, 580 CFM, 4.7 Sones |
| | Speed 3, 760 CFM, 5.4 Sones |
| Filter Type | Baffle filters (dishwasher-safe) |
| Ducting | Ducted |
| Duct Transition | 6" Round (Top) |
| Chimney (ducted out) | RA02DC-1 For ceiling heights 8'0" |
| Exterior Appearance | |
| Stainless Steel grade | 430 18-Gauge Satin Finish #4 |
| Electrical Requirements | |
| Electrical requirements | 120V / 60 Hz / 15 amp 15 or 20 Amp required |
| Dimensions | |
| Dimensions | 29 3/4" (W) x 24" (D) x 18" (H) |
| Accessories (optional) | |
| Extension Chimney Kit (ducted out) | RA02DC24-1 For ceiling heights 9'0" to 10'0" (with appropriate accessories) |
| | RA02DC48-1 For ceiling heights 9'0" to 11'0" (with appropriate accessories) |
| Warranty | |
| 2 Years full Warranty | Parts and labour, in-home service |

Dimensions

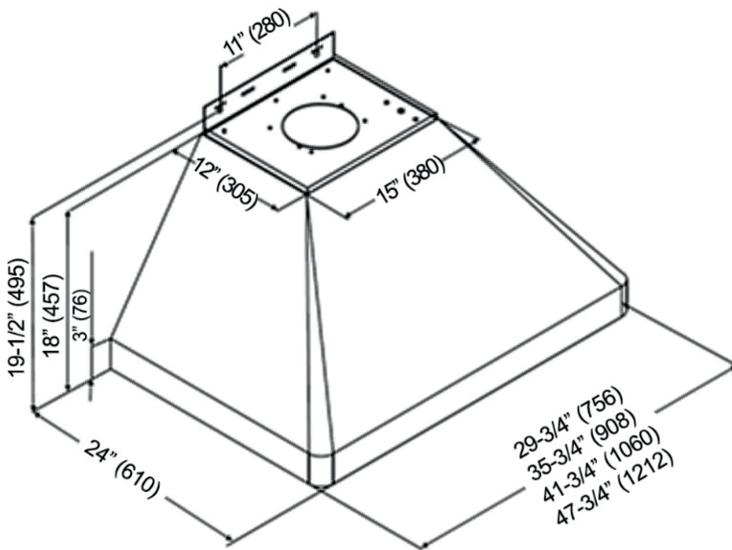

| For Ceiling | DC-1 | DC24-1 | DC48-1 |
|--------------------|--------------|---------------|---------------|
| Models 30" and 36" | 8'0" | 9'0" to 10'0" | 9'0" to 11'0" |
| Models 42" and 48" | 8'0" to 8'½" | 9'0" to 10'½" | 9'0" to 11'½" |


Installation

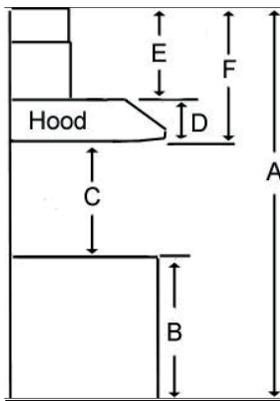

| | | |
|---|---|--------------------|
| A | Floor to ceiling Height | 8'0" |
| B | Floor to counter Top Height (standard) | 36" |
| C | Recommended Height between cooking surface and bottom of the hood | 27" min. - 30" max |
| D | Hood Height | 18" |
| E | Chimney Height | 12" |
| F | Chimney Height (including hood) | 30" |

Duct transition

6" Round (Top)



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice