





Model	
ECM630S2	
Features	
Controls	Electronic Touch Multi-Function Electronic Touch Controls
Illumination	2, 2.5W Premium LED lamps, Infinitely dimmable (bulbs included)
Blower Type	4-speed, 600 CFM
CRS CFM Reduction (< 300 CFM)	Included Function
Blower Performance	Speed 1, 160 CFM, 1.6 Sones Speed 2, 280 CFM, 3.5 Sones Speed 3, 470 CFM, 6.5 Sones Speed 4, 600 CFM, 8.7 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole Filter (X1)
Ducting	Ducted or Recirculating Installation (Recirculating Kit Sold Separately)
Duct transition	6" Round with Back Draft Damper (top)
Chimney (ducted out)	For ceiling heights 7'5" to 10'5"
Chimney (recirculating)	For ceiling heights 7'9" to 10'9"
Special features	Hush Silence System
Exterior Appearance	
Stainless Steel grade	430
Electrical Requirements	
Electrical requirements	120V-60 HZ / 530 Watt at 4.4 Amps
Dimensions	
Dimensions	30" (W) X 19 5/8" (D) X 1 15/16" (H)
Accessories (optional)	
Extension Chimney Kit (ducted out)	KIT0100315 For ceiling heights 8'5" to 12'5" (with appropriate accessories)
Extension Chimney Kit (recirculating)	KIT0100315 For ceiling heights 8'9" to 12'9" (with appropriate accessories)
Recirculating Kit	KIT02721
Warranty	
Complete 2 years warranty	Entire Appliance; In-Home; Parts & Labour

Dimensions

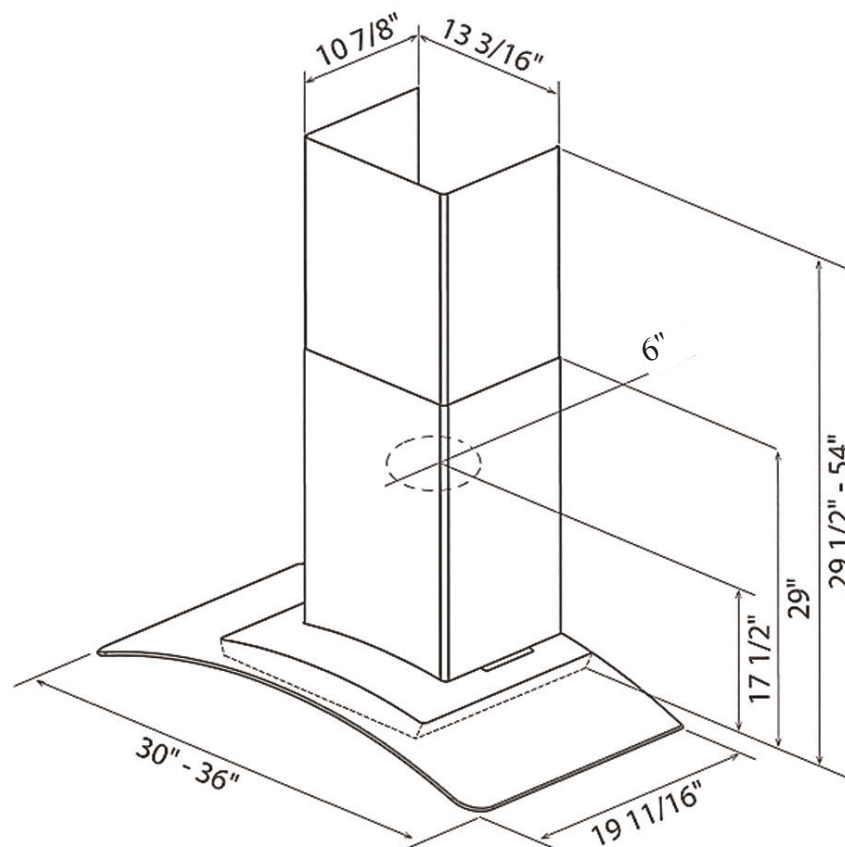


Installation

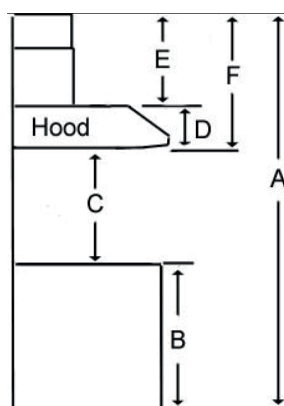

A	Floor to ceiling Height	TBD
B	Floor to counter Top Height (standard)	36"
C	Recommended Height between cooking surface and bottom of the hood	27" min. - 30" max
D	Hood Height	1 15/16"
E	Chimney Height	27 9/16" to 52 1/16"

Duct transition

6" Round (Top)



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice