




Model	
IS2242SQB-1 (+ chosen duct cover)	
Features	
Controls	Electronic with LED display
Lighting	4 Lamps, 3W LED (bulbs included), 3-level
Blower Type	750 CFM, 6-Speed
Blower Performance	Speed 1, 300 CFM, 1.0 sones
	Speed 2, 420 CFM, 2.0 Sones
	Speed 3, 510 CFM, 3.5 Sones
	Speed 4, 590 CFM, 5.0 Sones
	Speed 5, 640 CFM, 5.4 Sones
	Speed 6, 750 CFM, 6.0 Sones
Filter Type	Baffle filters (dishwasher-safe)
Ducting	Ducted
Duct Transition	6" Round (Top)
Chimney	For ceiling up to 11'0" high (with required accesory)
Electrical Requirements	
Electrical requirements	120V / 60 Hz / 15 amp 15 or 20 Amp required
Dimensions	
Dimensions	41 3/4" (W) x 27" (D) x 4" (H)
Accessories (optionnal)	
Duct Cover (ducted out)	IS22DC-1 (For ceiling from 8' to 9'1/2" high)
	IS22DC-16-1 (For ceiling 7'1/2" high)
Extension Chimney Kit (ducted out)	IS22DC-59-1 For ceiling heights 9'0" to 11'0"
Warranty	
2 Years full Warranty	Parts and labour, in-home service

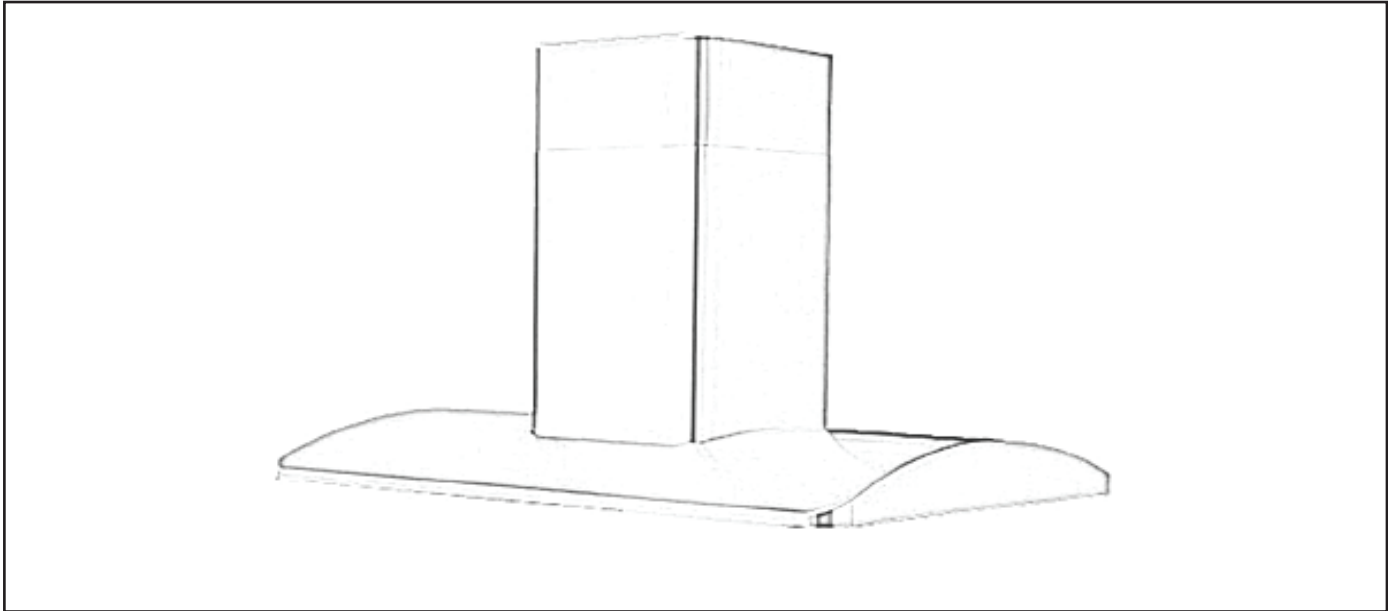

KOBE®

Installation Requirement
IS2236/42SQB-1

IS-22

Recommended height above countertop (clearance)

	Gas	Electrical
Minimum	30 inches	30 inches
Maximum	36 inches	36 inches


Ceiling Height (with appropriate accessories)

Minimum ceiling height	7'5"
Maximum ceiling height	11'0"

Duct Transition

Duct Transition	
6" round	Top

Dimensions

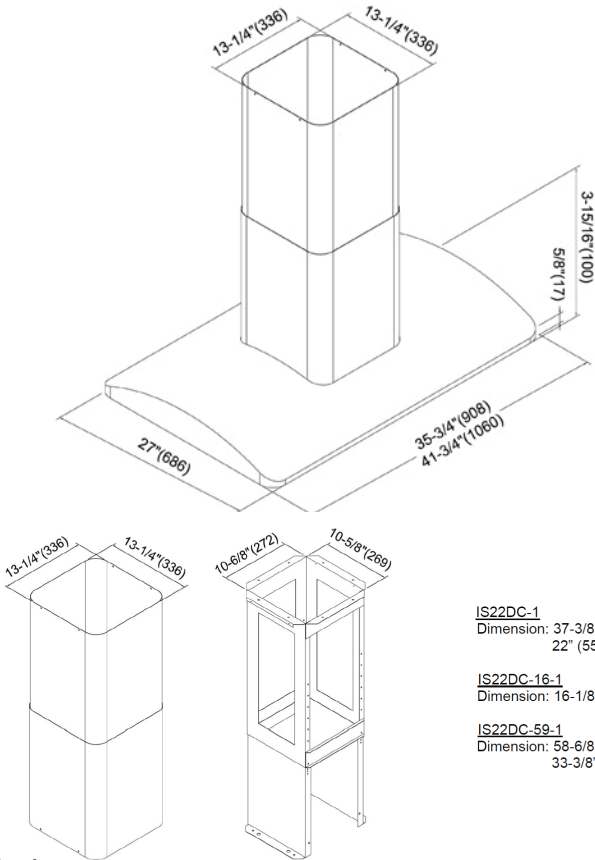

IS22DC-1
Dimension: 37-3/8" (950) MAX.
22" (559) MIN.

IS22DC-16-1
Dimension: 16-1/8" (410) MIN

IS22DC-59-1
Dimension: 58-6/8" (1493) MAX.
33-3/8" (848) MIN

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice

Need technical assistance ? 1(888) 651-2534