





Model		IS2236SQB-1 (+ chosen duct cover)
Features		
Controls	Electronic with LED display	
Lighting	4 Lamps, 3W LED (bulbs included), 3-level	
Blower Type	750 CFM, 6-Speed	
Blower Performance	Speed 1, 300 CFM, 1.0 sones	
	Speed 2, 420 CFM, 2.0 Sones	
	Speed 3, 510 CFM, 3.5 Sones	
	Speed 4, 590 CFM, 5.0 Sones	
	Speed 5, 640 CFM, 5.4 Sones	
	Speed 6, 750 CFM, 6.0 Sones	
Filter Type	Baffle filters (dishwasher-safe)	
Ducting	Ducted	
Duct Transition	6" Round (Top)	
Chimney (ducted out)	IS22DC-16-1 For ceiling heights 7'6"	
Electrical Requirements		
Electrical requirements	120V / 60 Hz / 15 amp 15 or 20 Amp required	
Dimensions		
Dimensions	35 3/4" (W) x 27" (D) x 20" - 63" (H)	
Accessories (optional)		
Extension Chimney Kit (ducted out)	IS22DC-22-1 For ceiling heights 8'0" to 9'6"	
	IS22DC-59-1 For ceiling heights 9'0" to 11'0"	
Warranty		
2 Years full Warranty	Parts and labour, in-home service	

Dimensions


IS22DC-16-1

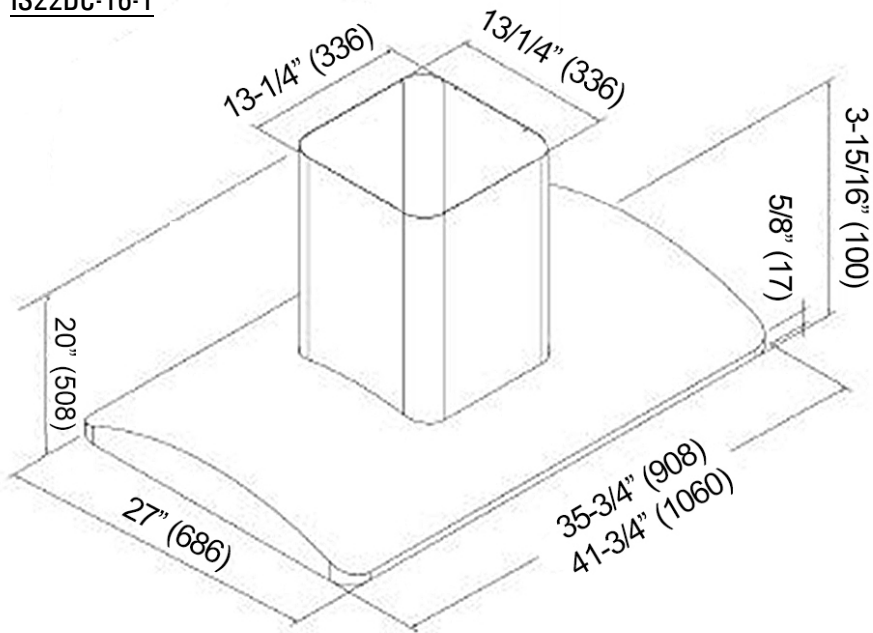


IS22DC-22-1

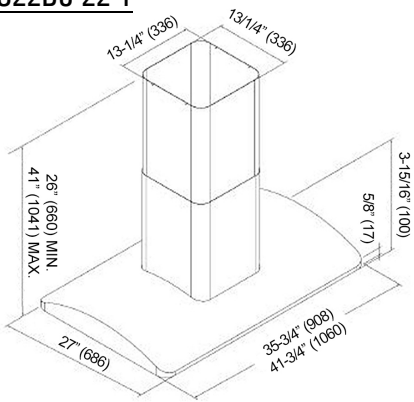

IS22DC-59-1

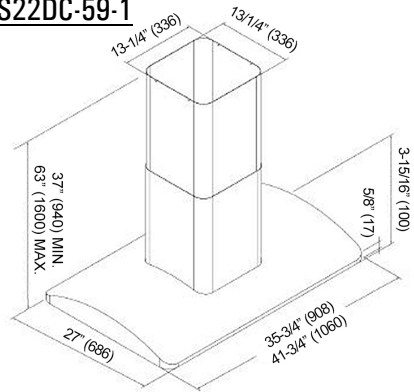


Installation

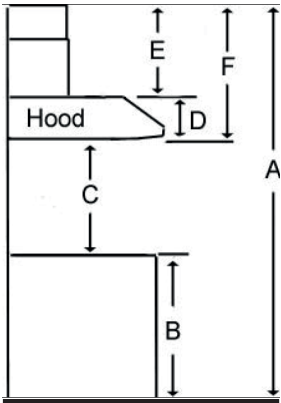

A	Floor to ceiling Height	TBD
B	Floor to counter Top Height (standard)	36"
C	Recommended Height between cooking surface and bottom of the hood	27" min. - 30" max
D	Hood Height	3 15/16"
E	Chimney Height	16 1/16" to 59 1/16"

Duct transition

6" Round (Top)



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice