





<b>Model</b>	<b>ESL642S2</b>
<b>Features</b>	
Controls	Multi-Function Electronic Touch Controls
Illumination	4, 40 Watt Halogen Lamps (Bulbs Included), 2 Intensities
Blower Type	4-speed, 600 CFM
CRS CFM Reduction (< 300 CFM)	Included Function
Blower Performance	Speed 1, 180 CFM, 1.6 Sones Speed 2, 300 CFM, 3.5 Sones Speed 3, 470 CFM, 6.5 Sones Speed 4, 600 CFM, 8.7 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole Filters (X3)
Ducting	Ducted or Recirculating Installation (Recirculating Kit Sold Separately)
Duct transition	6" Round with Back Draft Damper (top)
Chimney (ducted out)	For ceiling heights 7'8" to 10'5"
Chimney (recirculating)	For ceiling heights 8'0" to 10'9"
<b>Exterior Appearance</b>	
Stainless Steel grade	430
<b>Electrical Requirements</b>	
Electrical requirements	120V-60 HZ / 530 Watt at 4.4 Amps
<b>Dimensions</b>	
Dimensions	42" (W) X 27" (D) X 5" (H)
<b>Accessories (optional)</b>	
Extension Chimney Kit (ducted out)	EXXCEK06   For ceiling heights 8'11" to 13'3" (with appropriate accessories)
Extension Chimney Kit (recirculating)	EXXCEK06   For ceiling heights 9'3" to 13'7" (with appropriate accessories)
Recirculating Kit	KIT02665
<b>Warranty</b>	
Complete 2 years warranty	Entire Appliance; In-Home; Parts & Labour

## Dimensions

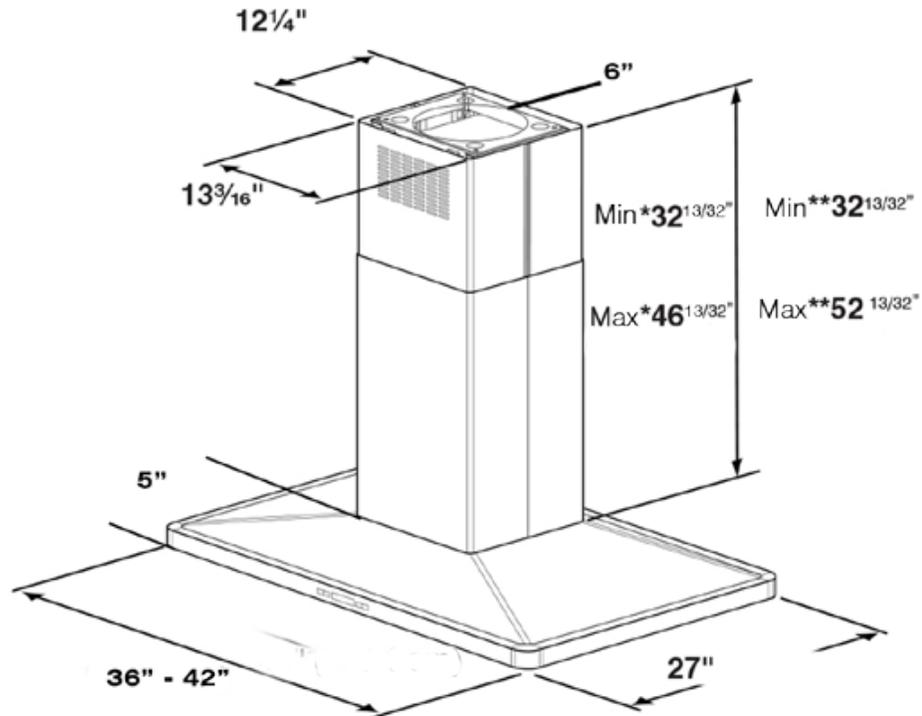


## Installation

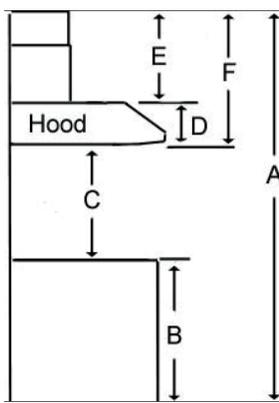

A	Floor to ceiling Height	TBD
B	Floor to counter Top Height (standard)	36"
C	Recommended Height between cooking surface and bottom of the hood	27" min. - 30" max
D	Hood Height	5"
E	Chimney Height	27 13/32" à 47 13/32"

## Duct transition

6" Round (Top)



*The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice*