Gas Slide-In Cooktop

professional series



Signature Features



Min-2-Max Burners®

With the widest range of BTU performance in the industry, these best-in-class dual-flame sealed burners offer unrivaled versatility — from a roaring 20,000-BTU boil to a gentle 1,100-BTU simmer.



Professional-Style Controls

Large 270 degree knobs give you precise control while cooking, so you get the results you want.



Continuous Grates

Designed for cooking multiple dishes at varying temperatures on a single cooktop, continuous grates allow you to move even the heaviest pots and pans from burner to burner with the utmost ease.



Versatile Cooking Accessories

Interchangeable accessories include a griddle plate, a special wok ring and simmer plate — so you can customize the cooktop to fit your cooking needs.

E36GC76PRS

PRODUCT DIMENSIONS

 Width
 35-7/8"

 Depth
 25"

 Height
 7-3/4"

MORE EASY-TO-USE FEATURES


Sealed Power Burners
Black Ceramic Glass Cooking Surface
Pilotless Ignition

BURNER	BTU
Right Front	20,000 – 1,100
Right Rear	9,500
Left Front	20,000
Left Rear	14,000
Centre Front	14,000
Centre Rear	5,000 - 1,500

Specifications subject to change.



Configuration	6 Sealed Burners
FEATURES	
Formed Stainless Steel Platform	Yes
Professional-Style Controls	Yes
Min-2-Max Burners® (BTU)	2 (20,000 – 1,100
Sealed Power Burner™ (BTU)	2 (14,000)
Sealed Burner (BTU)	1 (9,500)
Sealed Precision Burner™ (BTU)	1 (5,000 – 1,500)
Linear Flow Burner Valves	Yes
Electronic Pilotless Ignition	Yes
Continuous Grates	3
ACCESSORIES	
Griddle	Included
Wok Ring	Included
Simmer Plate	Included
LP Gas Conversion Kit	Included
9" Stainless Steel Backguard - PN# 903048-9010	Optional
Depth Adjustment Filler Kit* – PN# 903051-9010	Optional
SPECIFICATIONS	
Gas Inlet/Power Supply Location	Right Rear
Voltage Rating	120V/60 Hz
Connected Load (kW Rating) @ 120 Volts [‡]	0.12
Electrical Cable	Included
Approved for Single Oven Combination Installation**	No
Shipping Weight (Approx.)	120 Lbs.
*When replacing an existing cooktop with countertop cutout deeper than and less than 8-1/2", order free Depth Adjustment Filler Kit.	7-1/4"
**Not approved to be used over any Electrolux ICON® Single Wall Oven.	
[‡] For use on adequately wired 120V, dedicated circuit having 2-wire servi a separate ground wire. Appliance must be grounded for safe operation	1.
NOTE: Always consult local and national electric and gas codes. Refer to Guide for detailed installation instructions on the web at electroluxicon.ca	Product Installation

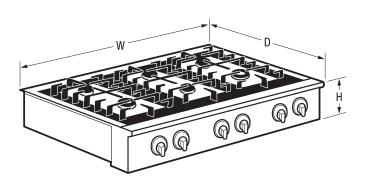

NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.ca.



Width	35-7/8"
Depth	25"
Height	7-3/4"