

# **BUILT-IN ALL REFRIGERATOR**

### Featuring IQ-Touch™ Electronic Controls



# SIGNATURE FEATURES



# PERFECT ORGANIZATION SYSTEM

Our organization system features
Luxury-Glide® drawers with removable/
adjustable dividers and two mini baskets,
Perfect Bins™ door storage that tilts out for
easy access and a condiment shelf, so you
can keep food organized and easily at hand.



# PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes a 3-year coverage on parts and one year on labour without charge.<sup>1</sup>



# **LUXURY-DESIGN® LIGHTING**

Our ramp-up designer LED lighting is as beautiful as it is functional, keeping the contents clearly visible.



# LUXURY-GLIDE® STORAGE DRAWER

Drawer glides out smoothly and fully extends, giving you easy access to what's inside.

# El32AR80QS

### **PRODUCT DIMENSIONS**

 Height (Cabinet Incl. Hinge)
 70-5/8"

 Width
 32"

 Depth (Incl. Door)
 26-1/2"

#### **MORE EASY-TO-USE FEATURES**

### **ALARM SYSTEM**

Notifies you if there's been a power failure, if a door stays open longer than five minutes and if the interior temperature of the refrigerator rises above 56 degrees for more than 60 minutes.

#### PERFECT BINS™ DOOR STORAGE

Convenient door storage bins tilt-out for easy access and can even be removed for even easier access.

#### **PUREADVANTAGE® AIR FILTER**

Keeps clean, filtered air circulated throughout to prevent odour transfer.

#### LUXURY-OUIET™ DESIGN

Designed for consistently quiet operation.

Available in:



Stainless (S)

# **OPTIONAL TRIM KITS**

# 84" LOUVERED TRIM KITS

(ECP8436SS & ECP8472SS)
Designed as a replacement option for the Sub-Zero® brand 650
Series models and for new-build installation

# 72" COLLAR TRIM KITS

(ECP7236SS & ECP7272SS)
Designed as a replacement option for the Sub-Zero® brand 601 Series models and for new-build installation.

# 79" LOUVERED/75" COLLAR TRIM KITS<sup>2</sup>

(TRIMKITSS1 & TRIMKITSS2) Designed as a replacement option for Electrolux ICON® brand models E32AR75FPS and E32AF75FPS and for new-build installation.


Eligibility based on product registration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labour for 1 year.

Not you have the selection of the elther 179" or 75" opening height. For 79" cutout opening height, installation requires of top louvered grille; for 57" cutout opening height, installation requires use of top turne size and shortening of both side trib" judices.

Sub-Zero® is a registered trademark of Sub-Zero. Inc.



CAPACITIES	
Total Capacity	18.6 Cu. Ft.
Total Shelf Area	22.4 Sq.Ft.
EXTERIOR	
Hidden Hinge Door Design	Yes
Signature Soft-Arc Handle Design	Yes
- <del>'</del>	163
FEATURES	
IQ-Touch™ Electronic Controls	Yes
Temp Alarm System	Yes
Door Ajar Alarm	Yes
Power Failure Alarm	Yes
PureAdvantage® Air Filtration	Yes
Adjustable Full-Width Glass Shelves (S	
Luxury-Glide® Full-Extension Deli Drav	
Luxury-Glide® Full-Extension Crisper/F	
3-Position Adjustable Crisper Divide	
Removable Basket Trays	2
Adjustable Dairy Door Bin	1
Full-Width Gallon Storage with Tall Bot	
Clear Half-Width 2-Litre Adjustable Do	
Perfect Bins <sup>™</sup> Door Storage	2
Full-Width Condiment Shelf	1
Luxury-Design® LED Lighting	Yes
Door Closer	Yes
Luxury-Quiet™ Design	Yes
Air Filter Indicator	Yes
Electronic Control Lock	Yes
ADDITIONAL FEATURES	
Sabbath Mode (Star-K® Certified)	Yes
ACCESSORIES	
84" Louvered Trim Kits: Single – PN#	ECP8436SS Optional
Double – PN#	ECP8472SS Optional
72" Collar Trim Kits: Single – PN#	
Double – PN#	ECP7272SS Optional
79" Louvered / 75" Collar Trim Kits <sup>1</sup> : Single – PN#	TRIMKITSS1 Optional
Double - PN#	TRIMKITSS2 Optional
SPECIFICATIONS	
Colour –	
Stainless Steel	Ş
Power Supply Connection Location	Right Bottom Rear
Voltage Rating	115V/60 Hz
Connected Load (kW Rating) @ 115 Vo	
Minimum Circuit Required (Amps)	20
Shipping Weight (Approx.)	266 Lbs.
Kits are designed to fit either 79" or 75" opening requires use of top louvered grille; for 75" cutout trim piece and shortening of both side trim pieces	
*An electrical supply with grounded three-prong re	eceptacle is required. The power supply
circuit must be installed in accordance with natio NOTE: Always consult local and national electric a	nal and local codes & ordinances.

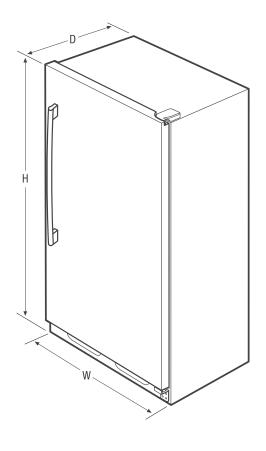

Height (Including Door)	71-3/8"
(Cabinet Including Hinge)	70-5/8"
Width	32"
Depth (Including Door)	26-1/2"
(With Door Open 90°)	57-3/8"

