

ELECTRIC COOKTOP



SIGNATURE FEATURES



GLIDE-2-SET® CONTROL PANEL

At the touch of a button adjust temperature so dishes come out perfectly.



FLEX-2-FIT® ELEMENTS

Elements adjust up to three sizes, so the element fits the cookware, not the other way around.



TRIPLE ELEMENT

An element that offers the versatility of three element sizes for ultimate flexibility, so it fits your cookware.



DIGITAL PRESET TOUCH SETTINGS

Up to 25 preset touch settings make adjusting heat up or down a snap.

El36EC45KS

PRODUCT DIMENSIONS

Width 36-3/4"
Depth 21-3/4"
Height (Extreme Bottom to Underside of Cooktop) 6-5/8"

MORE EASY-TO-USE FEATURES

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes a 3-year coverage on parts and one year on labour without charge.1

PERFECT OVER A WALL OVEN

Mounts above a single wall oven for additional installation options.

Available in:



Stainless (S)


ELEMENT	WATTS
6" to 9" to 12" Triple Expandable Element	1200W/2000W/3000W
5" to 7" Dual Expandable Element	750W/1800W
9" Electric Element	3200W
6" Electric Element – Left Rear	1200W
6" Electric Element – Right Rear	1200W

¹Eligibility based on product registration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labour for 1 year.



FEATURES	
Glide-2-Set® Electronic Touch Controls	Yes
Ceramic Smoothtop Glass Surface	Yes
6" to 9" to 12" Triple Expandable Element – 1200W/2000W/3000W	1
5" to 7" Dual Expandable Element – 750W/1800W	1
9" Electric Element – 3200W	1
6" Electric Element-Left Rear – 1200W	1
6" Electric Element-Right Rear – 1200W	1
Hot Surface Indicator Lights	Yes
Keep Warm Setting	Yes
Sabbath Mode (Star-K® Certified)	Yes
ACCESSORIES	
Granite Countertop Installation Kit – PN# 903061-9010	Optional
Cleaning Sponge	Included
SPECIFICATIONS	
Colour –	
Stainless Steel	S
Power Supply Connection Location	Right Centre Rear
Connected Load (kW Rating) @ 240/208 Volts	10.4/7.8
Amps @ 240/208 Volts	43.3/37.5
Minimum Circuit Required (Amps)	40
Electrical – Single phase 4-wire cable, 120/240 Volts or 120/208 Volts, 60 Hz, fused on both sides of line with ground	Required
Armoured Electrical Cable	Included
Approved for Single Oven Combination Installation*	Yes
Shipping Weight (Approx.)	66 Lbs.
NOTE: Always consult local and national electric codes. Refer to Product Installation Guide for instructions on the web at electroluxappliances.ca.	r detailed installation



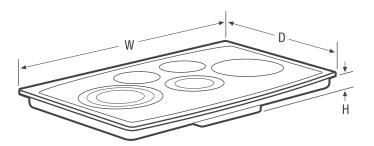

PRODUCT DIMENSIONS	
Width	36-3/4"
Depth	21-3/4"
Height (Extreme Bottom to Underside of Cooktop)	6-5/8"



