
## GV65160XXLCUS



## Fully integrated dishwasher



|   | are of inflow water: 70 °C<br>ronous single phase motor  |
|---|--|
| Selected progra<br>Control: Buttor  | amme indicator   |
| Main Washing t  |  |
| Time remaining  | mme<br>programme<br>ramme<br>action<br>amme indicator<br>for wash finish on control panel  |
| Up to 24 hours  |  |
| Fixed glass su  | ystem: <b>Manual</b><br>er jet levels: <b>4</b><br>ay arms: <b>2</b><br>er<br><b>Wide mesh base; Foldable left CupHolder; Fixed pin rows</b>   |
| Total AquaStop<br>Service diagnos<br>Stainless steel  | stics  |
| Water consump<br>Energy consum<br>Noise level: <b>44</b>  | ption - normal program: 0.87 kWh   |
| Dimensions of p<br>Niche dimension<br>Net weight: <b>33</b><br>Gross weight: <b>3</b><br>Consumption in<br>Connected load | ×H×D): <b>59.6 × 85.7 × 55.6 cm</b><br>packed product (W×H×D): <b>64 × 93 × 66.5 cm</b><br>ns (WxHxD): <b>60 × 86 × 57 cm</b><br><b>kg</b><br><b>85.9 kg</b><br>n standby mode: <b>0.49 W</b><br>d: <b>1,300 W</b><br>t of fuse: <b>15 amp</b> |

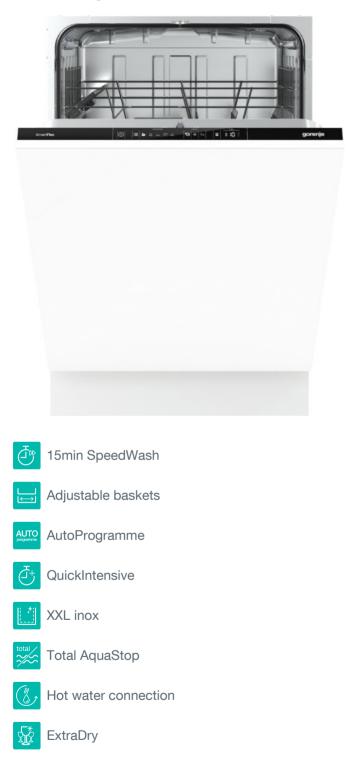