# Porter&Charles

SOPS60-EL

## SOPS60-EL



- 24" (60cm) wide stainless steel oven
- 92L (3.24 cu.ft) capacity
- Heat-activated catalytic liners for a continuous clean
- LCD touch display with electronic temperature control
- 9 cooking functions including True Fan convection
- Inclined ceiling light
- Hot air cooking technology giving perfect & even cooking
- Triple glazed door
- Full extension telescopic rails

Porter&Charles

## Specifications


### SOPS60EL

#### **OVEN BODY DIMENSIONS**

- D: 21<sup>7/8"</sup> x W: 22<sup>1/4"</sup> x H: 24<sup>7/16"</sup>
- D: 555 mm x W: 565 mm x H: 610 mm

#### **CUT-OUT DIMENSIONS**

- D: min.  $22^{1/4''}$  x W: min.  $22^{1/16''}$  x H:  $24^{3/16''}$
- D: min 565mm x W: min.560mm x H: 614mm

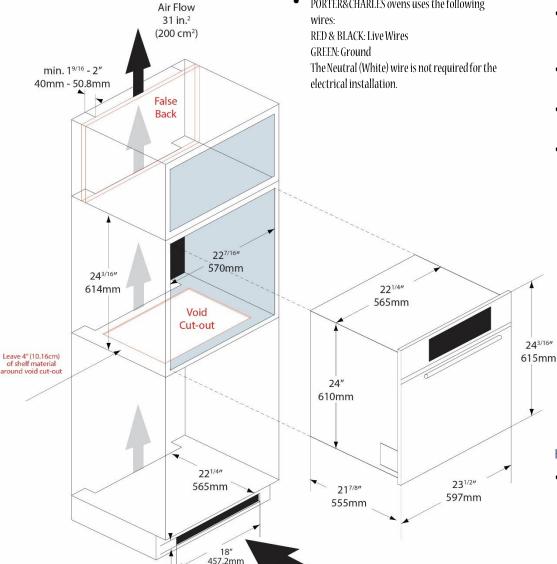

Air Vent 31 in.2 (200 cm<sup>2</sup>)

#### **ELECTRICAL REQUIREMENTS**

- (CONDOMINIUM) 208 / 230 Volt, 60Hz, 2780 Watt, 20 AMP
  - (HOME) 240 Volt, 60Hz, 3660 Watt, 20 AMP

#### \*IMPORTANT\*

- PORTER&CHARLES ovens are supplied with a 4' long electrical cable and must be hard wired to the electrical supply
- PORTER&CHARLES ovens uses the following

#### **VOID CUT-OUT**

- If the oven is mounted in a tall or demi-tall cabinet, there must be a minimum gap of 19/16" (4cm) cut out of the shelf and behind the upper cabinet to allow air to flow freely
- A void must be cut-out in the shelf of the cabinet. Leave 4" of shelf material around the
- Additional support must be added to the shelf with the void. The support must be able to withstand the oven weight.
- If sufficient air flow is not provided, the life of the appliance will be shortened.
- Cut-out in the toe kick is optional and recommended.
- Optional bottom vent grill (7427640) available.


#### FALSE BACKS

Install false backs for storage spaces. This will prevent contents from falling through the vent space. In addition, warm air will not interfere with your stored contents

Oven Specifications are subject to change without notice Detailed Specification Available at www.porterandcharles.ca

#### Air Flow Requirements

- \* If the oven is being placed under the counter, there must be a minimum gap of 19/16" (4cm) cut out of the shelf behind the oven to allow air to flow freely.
- \*A void must be cut-out in the shelf of the cabinet. Leave 4" of shelf material around the void.
- \* Additional support must be added to the shelf with the void. The support must be able to withstand the oven weight.
- \* If insufficient air flow is provided, the life of the appliance will be shortened.

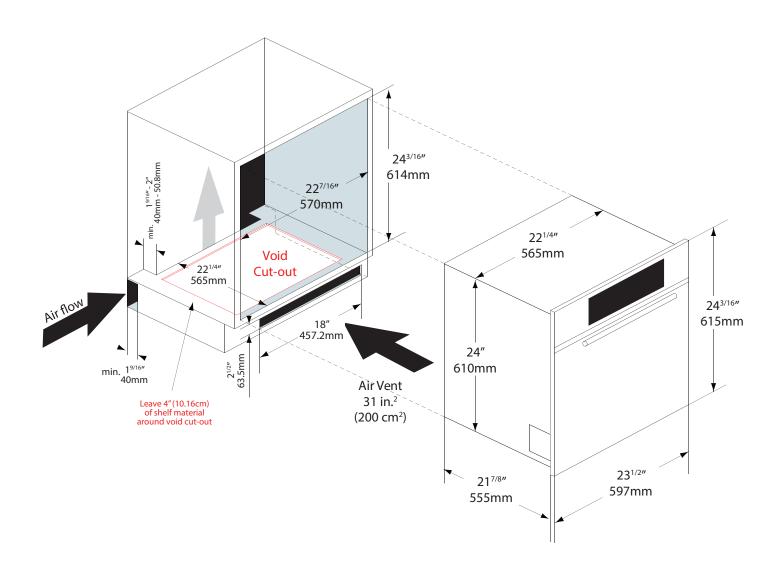

Porter&Charles

**Porter&Charles** products are designed and built to the highest standards. Each appliance is covered by a comprehensive 2 year parts and labour warranty.

Refer to product warranty policy for complete terms and conditions.

For Service & Parts **EURO-PARTS** 1.800.678.8352

Porter&Charles appliances are imported and distributed in North America by Euro-Line Appliances Inc.

For more information visit

www.euro-line-appliances.com / www.elawest.com

#### EURO-LINE APPLIANCES INC.

871 Cranberry Court Oakville, ON L6L 6J7 Canada

Toll Free: 1.800.421.6332 Showroom: 905.829.3980 marketing@euro-line-appliances.com

#### EURO-LINE APPLIANCES WEST INC.

2912 West 4th Ave Vancouver, BC V6K 1R2 Canada

Toll Free: 1.855.ELA WEST (352.9378) Showroom: 604.235.3980

info@elawest.com