

DESIGNER

OKEANITO

WALL



DESIGNER:  
FU-TUNG CHENG

The perfect marriage of vision, whimsy and discipline, the Okeanito never goes unnoticed. The graceful, sweeping hood balances softness and fluidity with cool linear elements to create a timeless design. Perforated side panels allow the Okeanito to


radiate gentle ambient light, infusing its surroundings with a sense of grace and calm. Now featuring the most advanced Bloom™ HD LED light bulbs and an optional wireless RF remote control.

**ZEPHYR**

ZEPHYRONLINE.COM

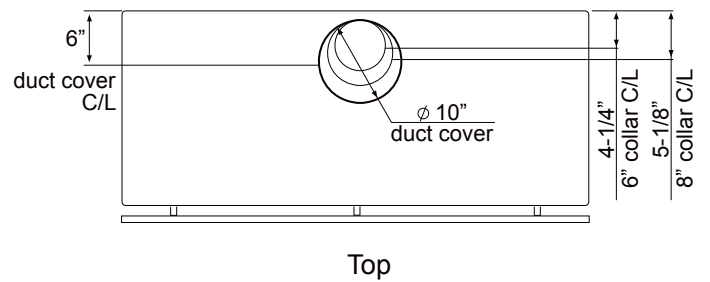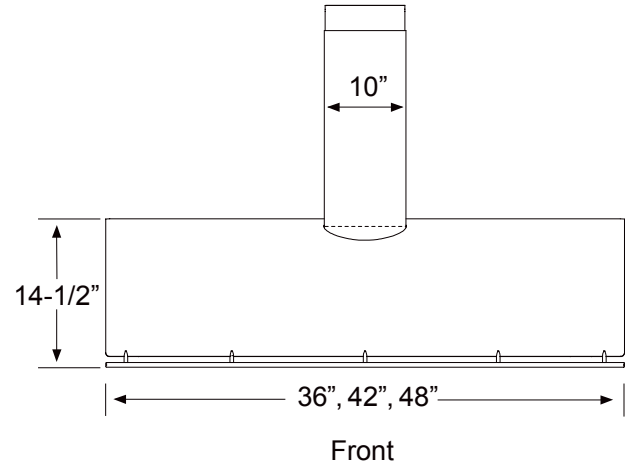

Optional Wireless Remote Control

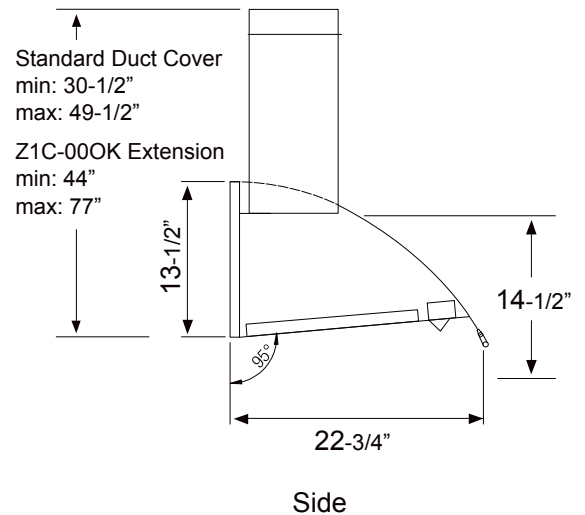

DESIGNER:  
FU-TUNG CHENG

MODEL	COK-E36BSX	COK-E42BSX	COK-E48BSX
Stainless Steel Size	36"	42"	48"
<b>PERFORMANCE</b>			
Internal Blower (CBI-290C)*	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
<b>FEATURES</b>			
Controls	Electronic Touch Controls	Electronic Touch Controls	Electronic Touch Controls
Speed Levels	3	3	3
Auto Delay-Off	Yes	Yes	Yes
Lighting	Bloom™ HD LED, 6W x2	Bloom™ HD LED, 6W x2	Bloom™ HD LED, 6W x4
Ambient Lighting	Incandescent, 40W x2	Incandescent, 40W x2	Incandescent, 40W x4
Dual-Level Lighting	Yes, Bloom™ HD LED	Yes, Bloom™ HD LED	Yes, Bloom™ HD LED
Filters	Professional Baffle	Professional Baffle	Professional Baffle
Wireless Remote Control Option	Yes, RF	Yes, RF	Yes, RF
Recirculating Option	No	No	No
Extension Duct Cover	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling
ADA Compliant	Yes (with remote accessory)	Yes (with remote accessory)	Yes (with remote accessory)
<b>DUCT SPECIFICATIONS</b>			
Vertical - Internal Blower	6" Round	6" Round	6" Round
Vertical - External/In-Line Blower	10" - 8"***	10" - 8"***	10" - 8"***
Horizontal	NA	NA	NA
<b>AC POWER</b>			
Hood w/ CBI-290C	120V, 60Hz, Max. 1.35A	120V, 60Hz, Max. 1.35A	120V, 60Hz, Max. 1.45A
Hood w/ CBI-600A	120V, 60Hz, Max. 3.35A	120V, 60Hz, Max. 3.35A	120V, 60Hz, Max. 3.45A
Hood w/ PBN-1000A	120V, 60Hz, Max. 6.05A	120V, 60Hz, Max. 6.05A	120V, 60Hz, Max. 6.15A
Hood w/ CBE-1000	120V, 60Hz, Max. 6.85A	120V, 60Hz, Max. 6.85A	120V, 60Hz, Max. 6.95A
<b>OPTIONAL ACCESSORIES</b>			
Extension Duct Cover	Z1C-000K	Z1C-000K	Z1C-000K
Make-Up Air Kit	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)
Wireless Remote Control	14000005	14000005	14000005
<b>MOUNTING HEIGHT RANGE***</b>	26" - 36"	26" - 36"	26" - 36"
<b>WARRANTY</b>	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor

CEILING HEIGHT	8'	8.5'	9'	9.5'	10'	10.5'	11'	12'	
<b>STANDARD DUCT COVER</b>	Ducted Mounting Height*** 26" - 30"	26" - 36"	26" - 36"	26" - 36"	26" - 36"	32" - 36"	NA	NA	NA
<b>EXTENSION DUCT COVER</b>	Ducted Mounting Height*** NA	NA	26" - 28"	26" - 34"	26" - 36"	26" - 36"	26" - 36"	26" - 36"	30" - 36"

\*Blower sold separately.

\*\*10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

\*\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.