# BUILT-IN FREEZER 24"

#### 24" STAINLESS STEEL EXTERIOR BUILT-IN FREEZER



 F7SFC24S1-R (RIGHT HINGE)

 CODE ID

 F7SFC24S1-L (LEFT HINGE)

 RIGHT HINGE

 LEFT HINGE

 Deep-freezing

 Total No Frost

 LED lighting

 Integrated Installation

 Ioiday Mode

 Ioiday Mode

CODE ID

### Features


Our column freezers are both powerful, elegant and provide commercial grade performance. With an elegant 304 stainless cladded door and matching pro handle, these columns match perfectly with our Fulgor Milano pro cooking products and feature a brilliant white aluminum interior with metal bins on full extension stainless glides. All units feature an accessory ice maker, with food preservation being the priority. Combining elegant design and commercial quality, ensures optimal food preservation performance. A dedicated compressor and evaporator provide consistent and precise temperatures throughout.

### SPECIFICATIONS

Stainless Steel Exterior Total No Frost Height adjustable glass shelves Metal freezer bins on stainless steel glides Icemaker with ice tray Luminous white interior Multilevel LED lighting Professional handle kit included

# REFRIGERATION

BUILT-IN FREEZER COLUMN

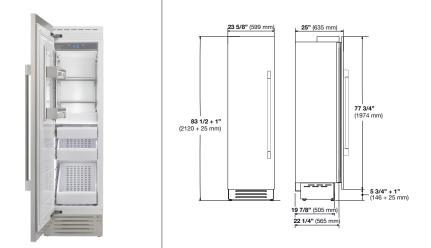


CODE ID	24" BUILT-IN FREEZER F7SFC24S1-L (LEFT HINGE) F7SFC24S1-R (RIGHT HINGE)	
Finish	Stainless Steel Exterior	
PERFORMANCES/CAPACITY		
Annual Energy Usage	548 kWh/yr	
Interior capacity (cbft)	12.67	
FEATURES		
Professional handle kit	•	
Shelves	2	
Adjustable Door Shelves	2	
Freezer Drawers	4	
LED lighting	•	
Ice Maker	•	
Ice Maker production capacity	2.2 lbs / 24 hrs	
No Frost	•	
DIMENSIONS/WEIGHT		
Width in	24"	609 mm
Height in	83 - 1/2"	2120 mm
Depth without handle in	25"	635 mm
Minimum niche height in	84 - 1/2"	2145 mm
Door clearance in	46"	1170 mm
Door opening angle	100°	
Net Weight	311 lbs	141 kg
POWER / RATINGS (115 V, 60 HZ)		
Watts / Amps	327W - 3A	
Power Cable	Nema 5-15P	
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	

# **BUILT-IN FREEZER 24"**

NICHE SPECIFICATIONS AND DIMENSIONS

#### NA STANDARD CUTOUT




### 100 (4") 140 (5 ½") 140 (5 ½") 100 (4") A A 23 3/4" (600 mm) min 2134 (84")

EUROPEAN STANDARD CUTOUT

When installing our top compressor models in a standard NA cut out it is recommended to use the J-profile trim kit to close the lateral gap of the appliance, alternatively use the standard plastic mounting clips when installing unit into Euro width cabinet.


Installing in the unit in a standard North American "cutout" without the J-profile trim kit, will result in a larger gap along the cabinet opening.




When installing our top compressor models in a new construction, it is recommended to use the European "cutout" dimensions to achieve a minimal gap on the lateral sides and avoid the need to use the J-profile trim kit.

Installing in the unit in a standard North American "cutout" without the J-profile trim kit, will result in a larger gap along the cabinet opening.

### DOOR SWING CLEARANCE

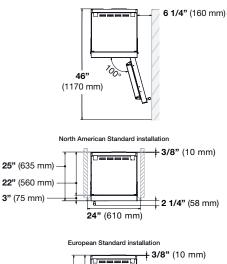



TECHNICAL DATA		
(A) Niche Width	see above	
(B) Unit Width	23" 5/8 (599 mm)	
(C) Unit Width with lateral frames	24" (610 mm)	

### ELECTRICAL AND WATER CONNECTIONS

