





# **CONTROLS** AND FUNCTIONS

**Controls** Electronic push buttons with

LCD display

Lighting 2 bulbs, frosted LED 3500k

Power and 1000 CFM, 4-speeds

speed

Filter Type 3 aluminium micro hole filters

and stainless steel baffle filters

8" & 10" round top **Duct transition** 

Power-off Yes

**Delay Timer** 

## **SPECIFICATIONS** AND DIMENSIONS

**Dimensions** 44" (W) x 18" (D) x 14 1/8" (H)

Stainless steel 430

grade

**Electrical** 120V / 60Hz / 3A


requirements

Warranty 1-year parts and labour

**UPC** Code 628173080300




#### **DIMENSIONS**

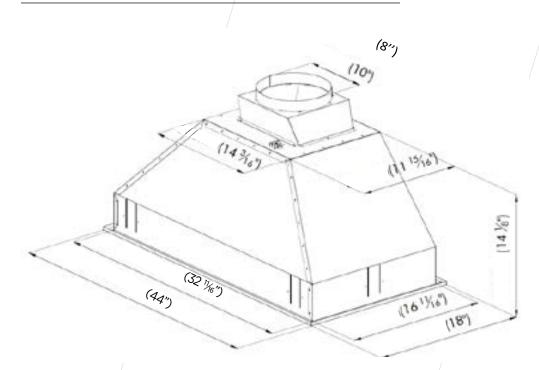

## **DUCT TRANSITION**

8" & 10" round top

# **INSTALLATION**



Α	Floor to ceiling height	VARIABLE
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	14 1/8"