

CLASSICA WALL RANGE HOOD



A VALUE ALTERNATIVE IN CANOPY WALL HOODS. DESIGNED TO OFFER A PREMIUM LOOK WITHOUT THE HIGH-END PRICE TAG, THE CLASSICA OFFERS TRADITIONAL STYLING, DESIGNER FEATURES AND SOLID PERFORMANCE THAT MAKE THE CLASSICA A GREAT VALUE IN CANOPY RANGE HOODS.



AVAILABLE MODELS

Model #	Size / Color	Motor Class (CFM)	Sound Levels (sones)
CLAS30SS	30" Stainless	600 CFM	2.8 - 7.5
CLAS36SS	36" Stainless	600 CFM	2.8 - 7.5

KEY FEATURES



Electronic controls

Backlit electronic controls with a blue LED light to indicate the current speed and lighting on/off.



Lower ductless chimney

An upper chimney with return air grates on the side is included. Just purchase the ductless kit to complete the ductless

Mesh



Optional (Baffle)




Easy care filters

Easy to clean dishwasher safe mesh filters (included) or dishwasher safe stainless steel baffle (option) with easy latch for effortless removing and replacing for cleaning.

SPECIFICATIONS

min. / max. ceiling height	7' 5" - 9' 2 3/4"
convertible to ductless / recirculating	yes - with DUCTCLAS
canopy depth / height	19" d 10 3/4" h
high ceiling kit	yes - reaches up to 11' 1/2" ceilings
controls	4 speed push button w/ blue LED
lighting	2 x 20 (W) halogen
ducting top	6" round
grease filters	dishwasher safe mesh and optional stainless steel kit
10 minute intensive speed	yes
AC input	120 V - 60 hz
AC power	max 370 W 2.1 amps

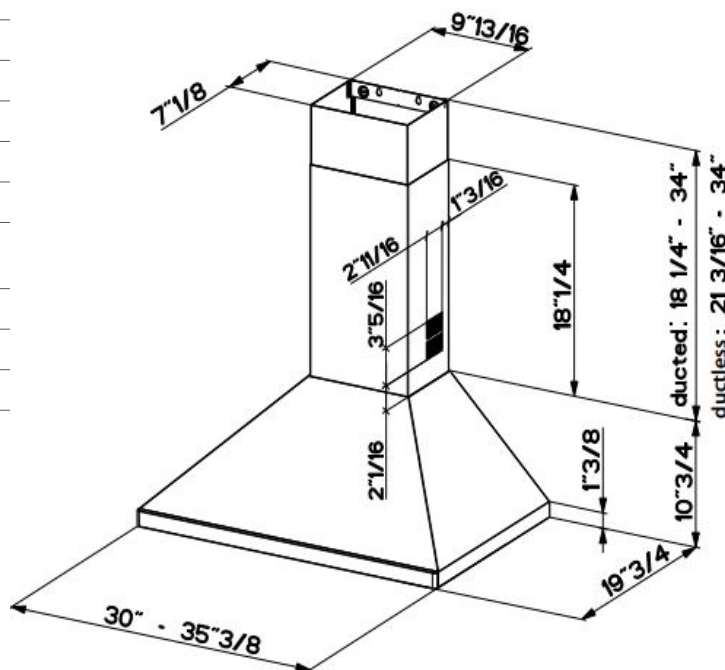

SPEED	1	2	3	BOOST
CFM	250	350	450	560
sones	2.8	4.3	6.0	7.5

Technical drawing of a ducted elbow. The drawing shows a side view of the elbow with the following dimensions:

- Top horizontal section: 18 1/4"
- Left vertical section: 10 3/4"
- Right vertical section: 18 1/4"
- Bottom horizontal section: 10 3/4"
- Inner radius: 2 1/16"
- Outer radius: 3 5/16"
- Top flange thickness: 1 3/16"
- Bottom flange thickness: 2 11/16"
- Bottom flange width: 1 3/8"

