


INSERT-24-1A

24" Built-In Insert Range Hood

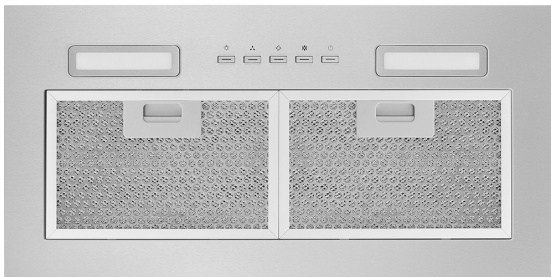

AVAILABLE FINISHES / COLOR OPTIONS

- INSERT-24-1A**
Stainless-Steel

KEY FEATURES

- Built-In Style Range Hood**

Offers premium performance in a discreet package. This hood is specifically crafted to be fully integrated within your overhead cabinets, for a seamless finish.
- 3 Fan Speeds**

Featuring three-speed settings, delivering optimal airflow for any cooking situation, ensuring effective ventilation whether you're simmering, sautéing, or frying.
- Quiet CFM Motor**

Experience cleaner kitchen air with our efficient range hood. Its dependable motor effectively removes smoke, grease, and odours while operating at minimal noise levels, ensuring a peaceful cooking environment.
- LED Lighting**

Energy-efficient, long-lasting LED lights effectively illuminate your cooking surface, enhancing the visibility of the cooking process.
- Push Button Control**

Located on the front of the unit, these controls make regulating the hood functions more convenient. From modifying the fan speed to adjusting the light settings, giving you complete control of the cooking process.
- Dishwasher-Safe Honeycomb Filters**


These highly functioning filters remove grease and odours when cooking. These removable filters can be cleaned in the dishwasher, ensuring that your hood is continually efficient.

GENERAL PROPERTIES
Built-in under cabinet insert range hood
Includes door-cover and spacer for 12", 13", and 15" cabinet depth
Stainless steel
Ducted/Vented
FEATURES
2 x LED lights
3 speed adjustment
Electronic push buttons
Dishwasher safe honeycomb filter
6" Duct adaptor included
DIMENSIONS
Product Dimensions: W/H/D (In/mm) - 12" Cabinet Depth 23 ³ / ₈ " (594mm) / 9 ⁷ / ₈ " (251mm) / 11 ⁵ / ₈ " - 12 ³ / ₁₆ " (295mm - 310mm)
Product Dimensions: W/H/D (In/mm) - 13" Cabinet Depth 23 ³ / ₈ " (594mm) / 9 ⁷ / ₈ " (251mm) / 12 ⁵ / ₈ " - 13 ¹ / ₄ " (321mm - 337mm)
Product Dimensions: W/H/D (In/mm) - 15" Cabinet Depth 23 ³ / ₈ " (594mm) / 9 ⁷ / ₈ " (251mm) / 14 ⁵ / ₈ " - 15 ¹ / ₄ " (372mm - 387mm)
Cut-Out Dimensions: W/D (In/mm) - 12"-13"-15" Cabinet Depth 20 ³ / ₄ " (527mm) / 10 ³ / ₈ " (263mm)
TECHNICAL SPECIFICATIONS
Power Supply: 110-120V ~ 60Hz ~ 15 Amp
Rated Input Power: 218W
Motor Power: 216W
Air flow - CFM Rating: 300 CFM
Lighting Power: 2x1 W
*Supplied with a 5ft long electrical cable.


Installation Details

PRODUCT DIMENSIONS (INCH/MM) - 12" CABINET DEPTH	PRODUCT DIMENSIONS (INCH/MM) - 13" CABINET DEPTH
Width: 23 ³ / ₈ " / Height: 9 ⁷ / ₈ " / Depth: 11 ⁵ / ₈ " - 12 ³ / ₁₆ "	Width: 23 ³ / ₈ " / Height: 9 ⁷ / ₈ " / Depth: 12 ⁵ / ₈ " - 13 ¹ / ₄ "
Width: 594mm / Height: 251mm / Depth: 295mm - 310mm	Width: 594mm / Height: 251mm / Depth: 321mm - 337mm
PRODUCT DIMENSIONS (INCH/MM) - 15" CABINET DEPTH	CUTOUT DIMENSIONS (INCH/MM) - 12"-13"-15" CABINET DEPTH
Width: 23 ³ / ₈ " / Height: 9 ⁷ / ₈ " / Depth: 14 ⁵ / ₈ " - 15 ¹ / ₄ "	Width: 20 ³ / ₃₄ " / Depth: 10 ³ / ₈ "
Width: 594mm / Height: 251mm / Depth: 372mm - 387mm	Width: 527mm / Depth: 263mm


12" Cabinet

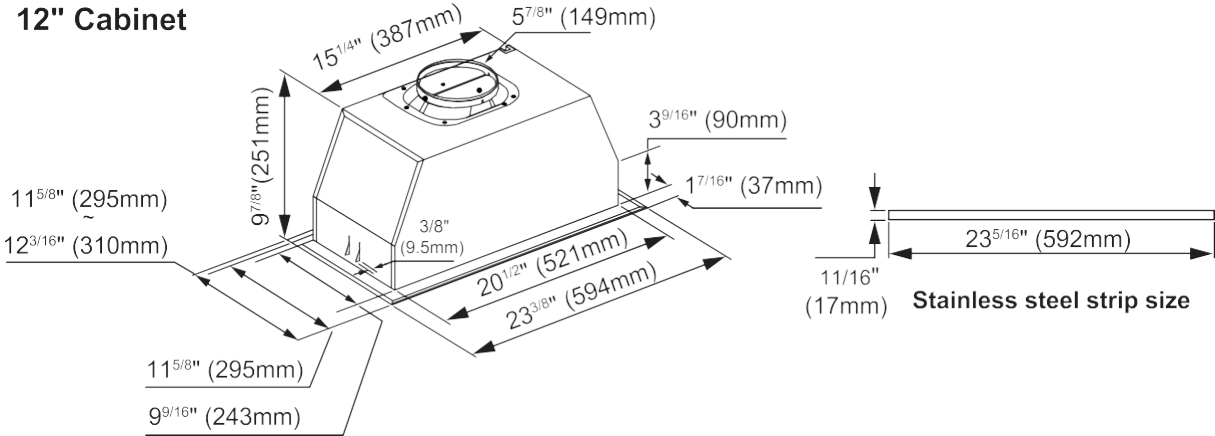

13" Cabinet

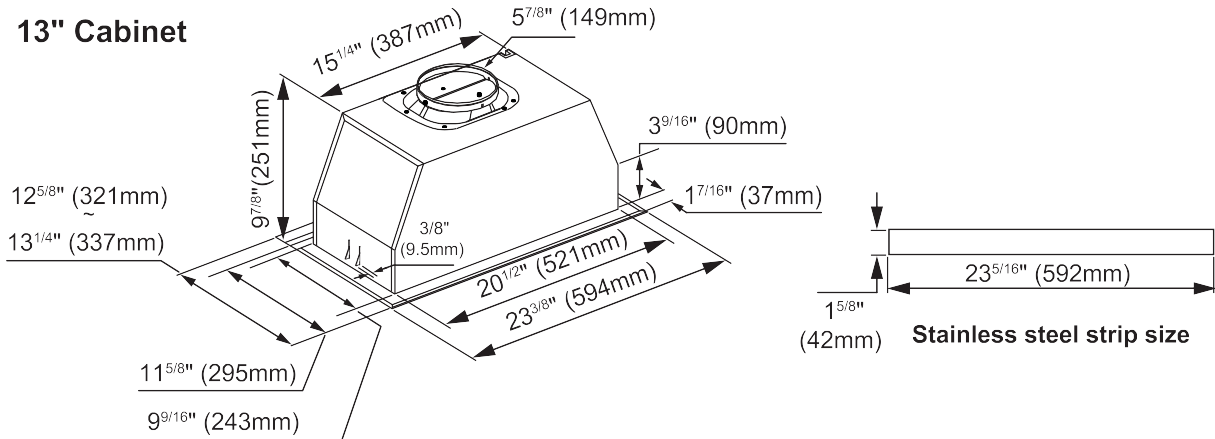

15" Cabinet

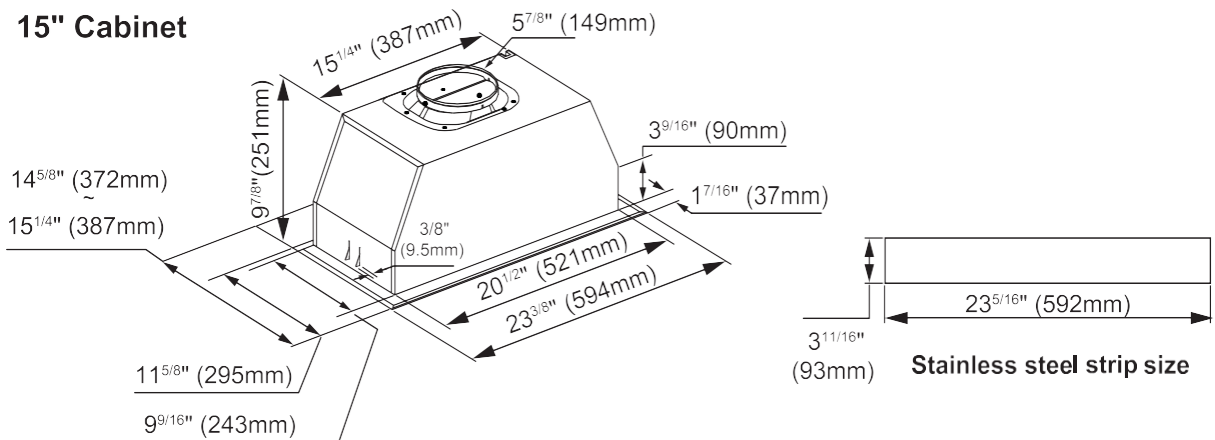


Installation Details

PRODUCT DIMENSIONS (INCH/MM) - 12" CABINET DEPTH	PRODUCT DIMENSIONS (INCH/MM) - 13" CABINET DEPTH
Width: 23 ³ / ₈ " / Height: 9 ⁷ / ₈ " / Depth: 11 ⁵ / ₈ " - 12 ³ / ₁₆ "	Width: 23 ³ / ₈ " / Height: 9 ⁷ / ₈ " / Depth: 12 ⁵ / ₈ " - 13 ¹ / ₄ "
Width: 594mm / Height: 251mm / Depth: 295mm - 310mm	Width: 594mm / Height: 251mm / Depth: 321mm - 337mm


PRODUCT DIMENSIONS (INCH/MM) - 15" CABINET DEPTH	CUTOUT DIMENSIONS (INCH/MM) - 12"-13"-15" CABINET DEPTH
Width: 23 ³ / ₈ " / Height: 9 ⁷ / ₈ " / Depth: 14 ⁵ / ₈ " - 15 ¹ / ₄ "	Width: 20 ³ / ₄ " / Depth: 10 ³ / ₈ "
Width: 594mm / Height: 251mm / Depth: 372mm - 387mm	Width: 527mm / Depth: 263mm

*NOTE

- 1. The range hood must be installed at a minimum height of 24" above the cooking surface, whether it is a gas, electric, or induction cooktop.
- 2. Ensure that the wall designated for hood installation is adequately sturdy to support the range hoods weight. Additionally, ensure the hood is mounted level for the best performance.
- 3. Cut a hole in the cupboard according to the size in the image below.
- 4. Bottom hinges of the cabinet door should be installed at 5" or more above the cabinet base.

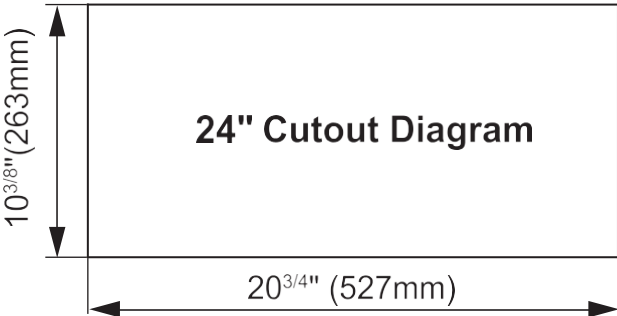


Assumes installation with 5/8" wide cabinet gables

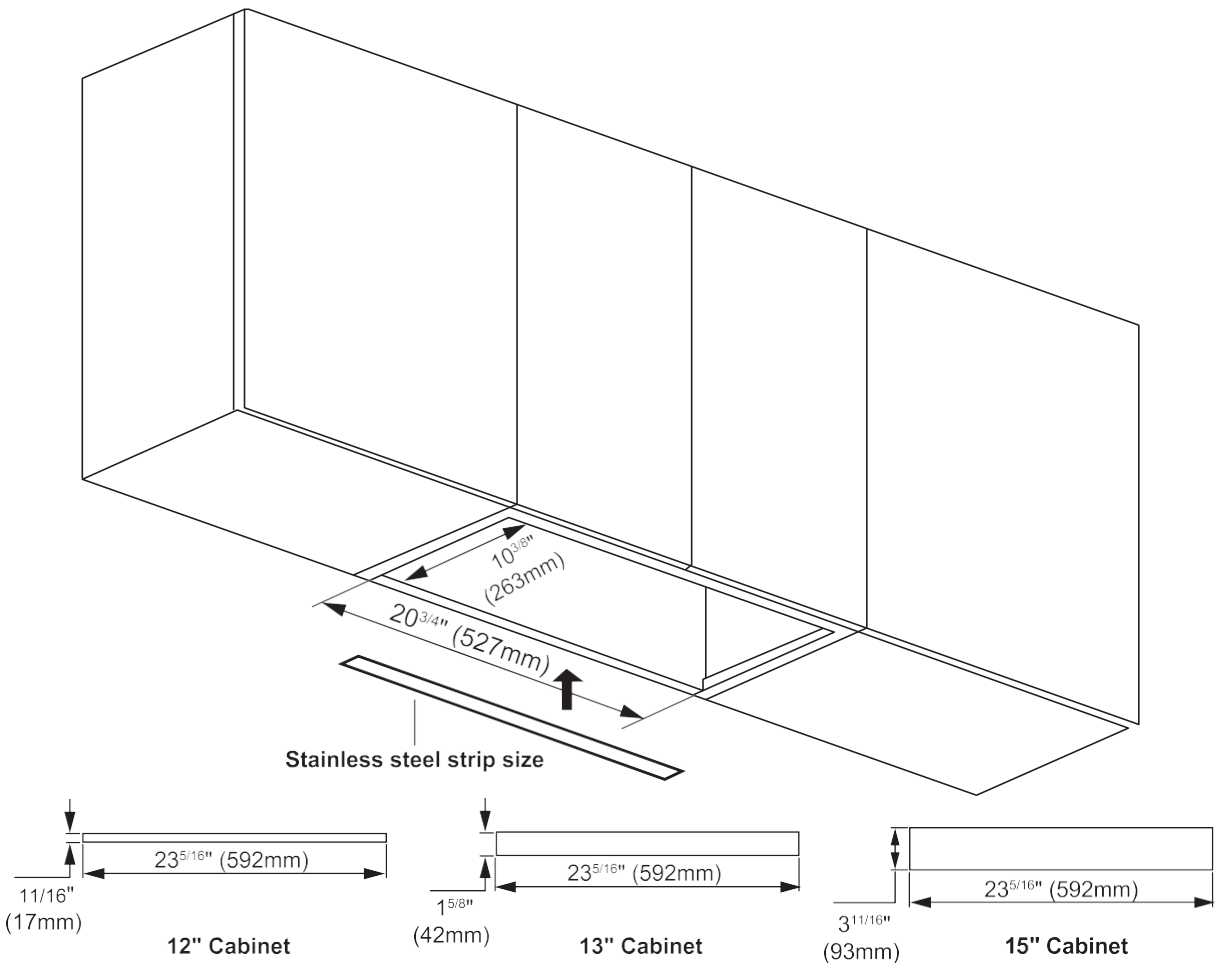

INSERT-24-1A

Recommended Cabinet Minimum Clearance From Cooking Surface

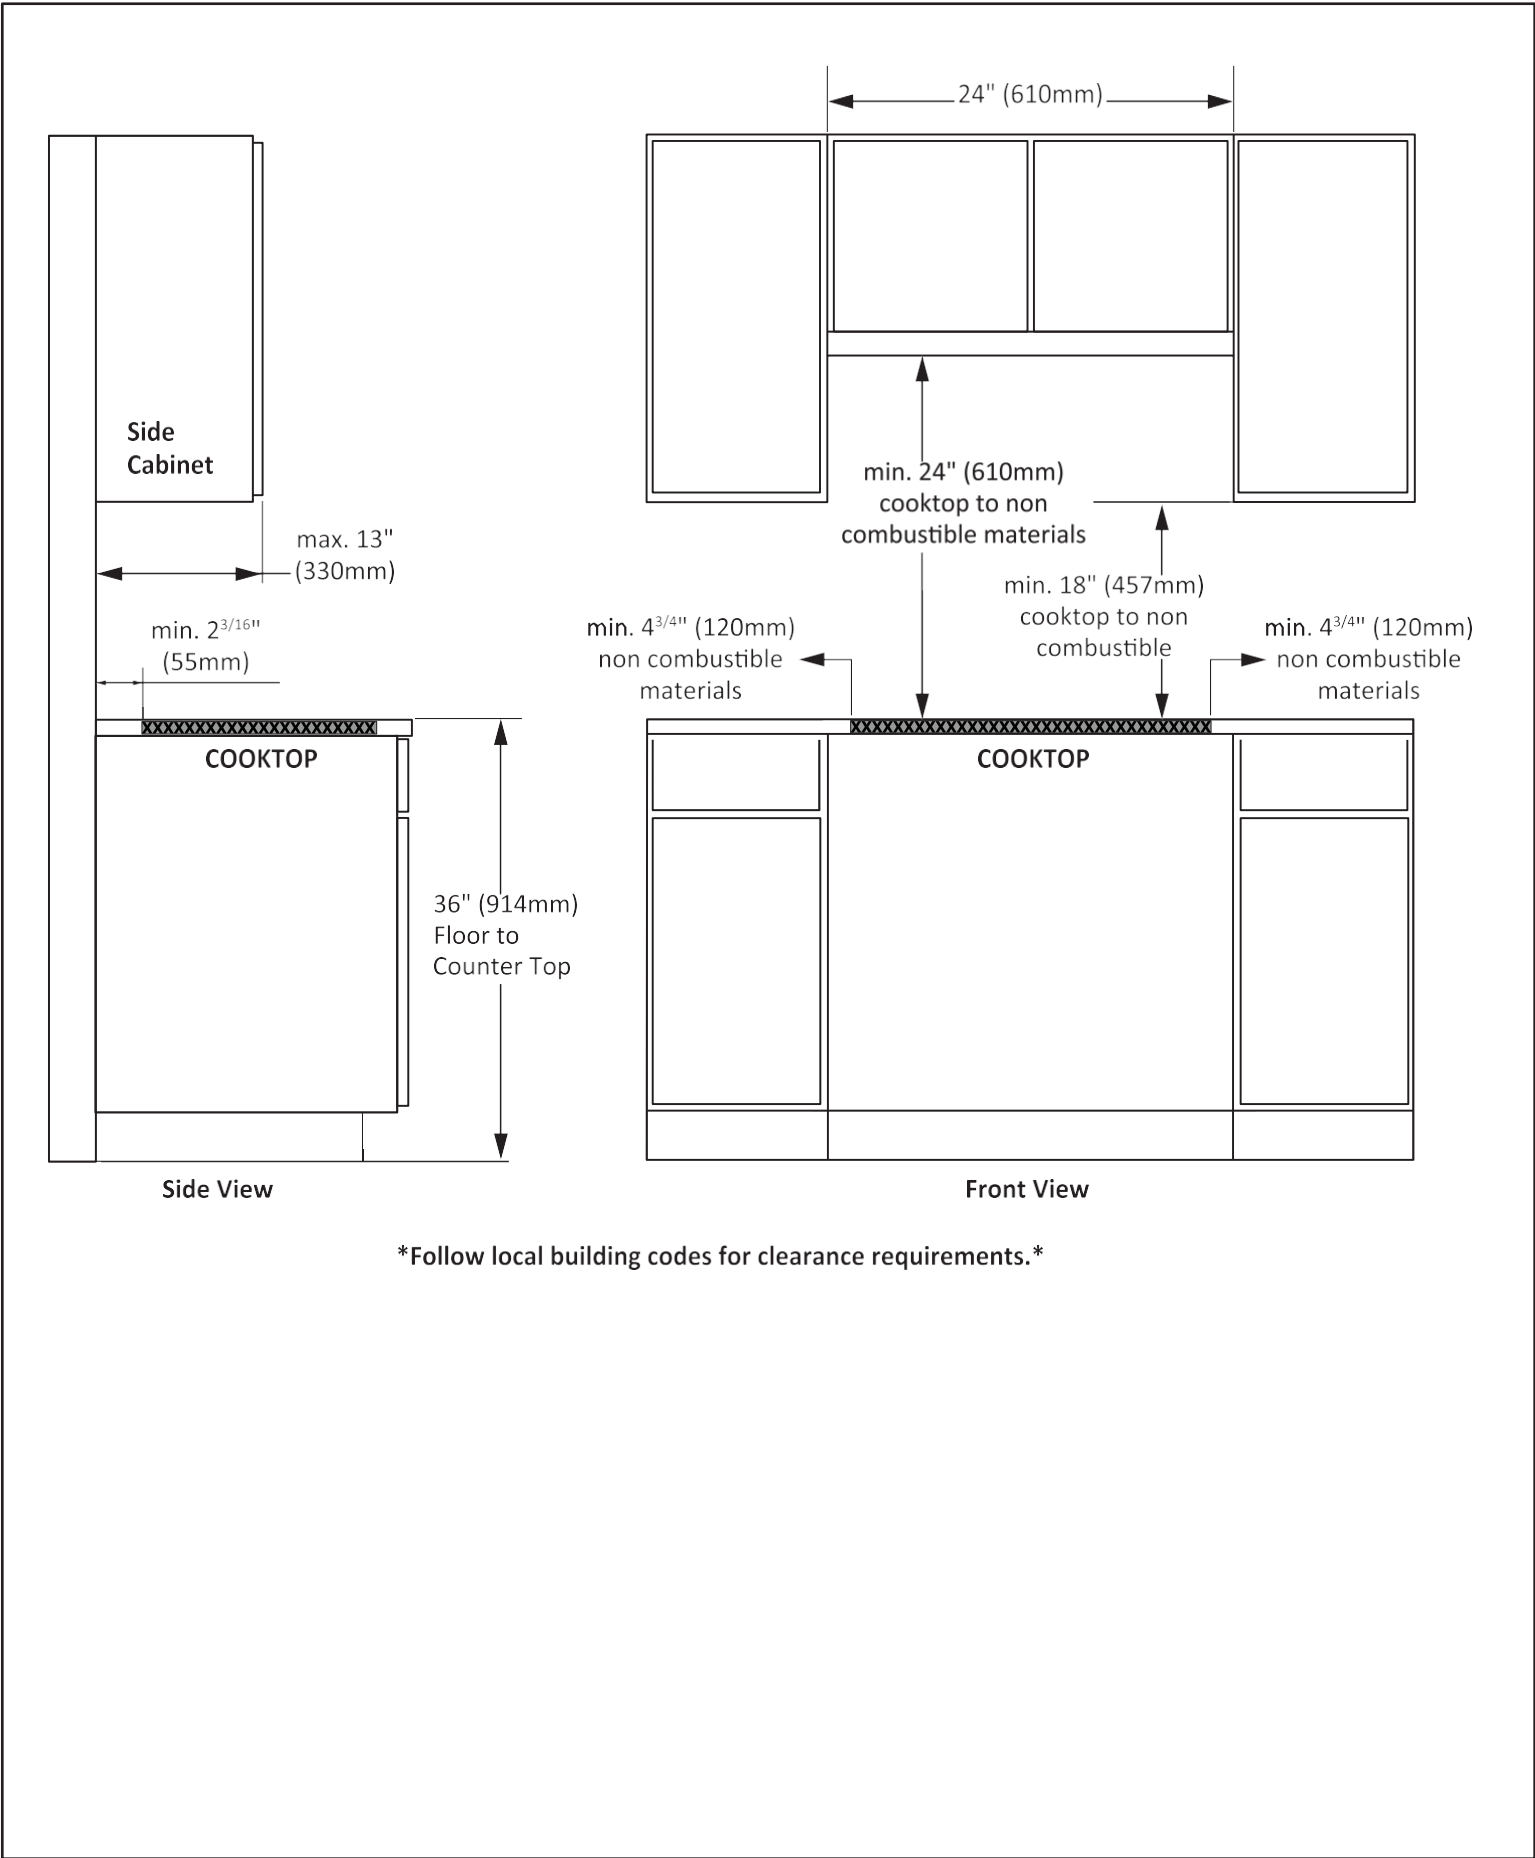

Notes: Porter & Charles reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Warranties: Please see the Use & Care manual or Porter & Charles website for a statement of limited warranty. For more information on our entire line of products, go to www.porterandcharles.ca or call 905.829.3980 © Porter & Charles. All rights reserved.

Other Product Downloads Available at
porterandcharles.ca



WARRANTY INFORMATION

Porter & Charles Appliances are designed and manufactured to the highest standards.
Each appliance is covered by a comprehensive 2-year parts and labour warranty.
Refer to product warranty policy for complete terms and conditions.

FOR PARTS & SERVICE

Euro-Parts & Service
39822 Belgrave Road, Belgrave, ON. N0G 1E0 1 866 722 2262
www.euro-parts.ca • parts@euro-parts.ca • service@euro-parts.ca

Porter & Charles appliances are imported and distributed in North America by Euro-Line Appliances Inc. For more information, please visit one of our showrooms or
www.ela.ca / www.elawest.ca

EURO-LINE APPLIANCES INC.

871 Cranberry Court
Oakville, ON L6L 6J7
Tell: 905.829.3980
Toll-Free: 1-800.421.6332
Email: info@ela.ca

EURO-LINE APPLIANCES INC.

101-1014 Homer Street
Vancouver, BC V6B 2W9
604.235.3980
1-855.352.9378
infowest@ela.ca