





Model	EHI648SS
Features	
Controls	Electronic Touch
Illumination	4, 20 Watt Halogen Lamps (Bulbs Included), 2 Intensities
Blower Type	EDS3 Technology 600 CFM, 4-speed
Blower Performance	Speed 1, 195 CFM, 0.7 Sones
	Speed 2, 340 CFM, 1.8 Sones
	Speed 3, 500 CFM, 3.5 Sones
	Speed 4, 600 CFM, 4.8 Sones
Filter Type	Mesh Aluminium Filter Plus Perimeter Aspiration Plate
Ducting	Ducted or Recirculating Installation (Recirculating Kit Sold Separately)
Duct transition	8" round with Back Draft Damper included
Chimney (ducted out)	For heights 8'0"-9'6"
Chimney (recirculating)	For ceiling heights 8'1" to 9'6"
Exterior Appearance	
Stainless Steel grade	430
Electrical Requirements	
Electrical requirements	120V-60 HZ / 550 Watt at 4.6 Amps
Dimensions	
Dimensions	47¼" (W) X 27 5/8" (D) X 2 3/8" (H)
Accessories (optional)	
Recirculating Kit	
Warranty	
Complete 2 years warranty	Entire Appliance; In-Home; Parts & Labour

Dimensions

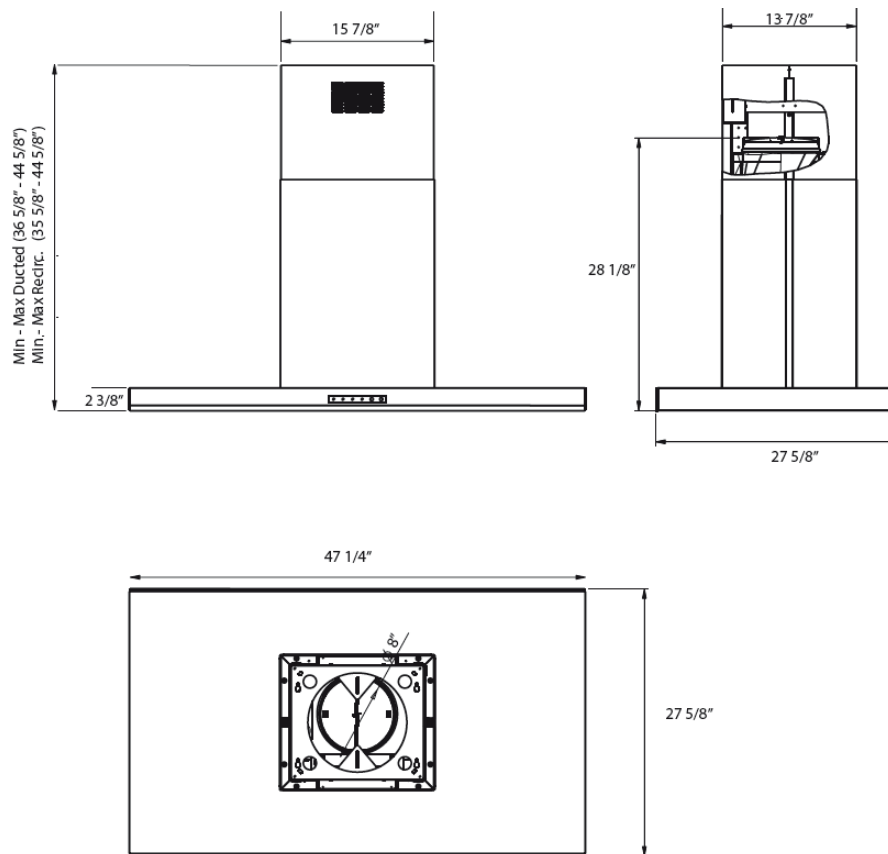


Installation

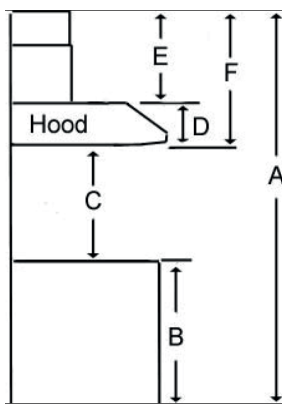

A	Floor to ceiling Height	TBD
B	Floor to counter Top Height (standard)	36"
C	Recommended Height between cooking surface and bottom of the hood	27" min. - 30" max
D	Hood Height	2 $\frac{3}{8}"$
E	Chimney Height	33 $\frac{1}{4}"$ to 42 $\frac{1}{4}"$

Duct transition

8" Round (Top)



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice